




#### TL18 Series Spotlight


Widely used for mall, Show room, Bar, museum, gallery, Classical but with elegant design for friendly design of 90° adjustable & 350° rotation. Multiple beam angle & high CRI for different lighting purpose. High efficiency of lighting transmission for higher lumens output



KAS-TL18-A-95  
Power:20W/30W  
Diameter: 95mm



KAS-TL18-C-95  
Power:20W/30W  
Diameter: 95mm





Model	KAS-TL18-A-95	KAS-TL18-C-95	KAS-TL18-A-95	KAS-TL18-C-95
Product Photo				
Dimension(mm)				
Wattage	20W/30W	20W/30W	20W/30W	20W/30W
CCT	3000K/3500K/4000K	3000K/3500K/4000K	3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90	>90	>90
Beam Angle	15°/20°/30°/55°	15°/20°/30°/55°	15°/20°/30°/55°	15°/20°/30°/55°
Lumen	1123-1980LM	1512-2202LM	1123-1980LM	1512-2202LM
IP	IP 20	IP 20	IP 20	IP 20
Dimming	TRIAC/1-10V/DALI	TRIAC/DALI	TRIAC/1-10V/DALI	TRIAC/DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White	Black/White	Black/White

Optical Accessories






Honeycomb Filter   Stripped Glass   Fabric Glass



Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-TL18-A-9520	20W	34V	500mA	90	2700K	15°	2038lm	1448lm	ON-OFF
						20°	2038lm	1235lm	TRIAC
						30°	2038lm	1165lm	1-10V
						55°	2038lm	1123lm	DALI
	20W	34V	500mA	90	3000K	15°	2121lm	1507lm	ON-OFF
						20°	2121lm	1286lm	TRIAC
						30°	2121lm	1213lm	1-10V
						55°	2121lm	1169lm	DALI
	20W	34V	500mA	90	4000K	15°	2155lm	1531lm	ON-OFF
						20°	2155lm	1306lm	TRIAC
						30°	2155lm	1232lm	1-10V
						55°	2155lm	1187lm	DALI
KAS-TL18-A-9530	30W	34V	700mA	90	2700K	15°	2853lm	1872lm	ON-OFF
						20°	2853lm	1786lm	TRIAC
						30°	2853lm	1609lm	1-10V
						55°	2853lm	1442lm	DALI
	30W	34V	700mA	90	3000K	15°	2970lm	1949lm	ON-OFF
						20°	2970lm	1860lm	TRIAC
						30°	2970lm	1676lm	1-10V
						55°	2970lm	1502lm	DALI
	30W	34V	700mA	90	4000K	15°	3018lm	1980lm	ON-OFF
						20°	3018lm	1890lm	TRIAC
						30°	3018lm	1703lm	1-10V
						55°	3018lm	1526lm	DALI

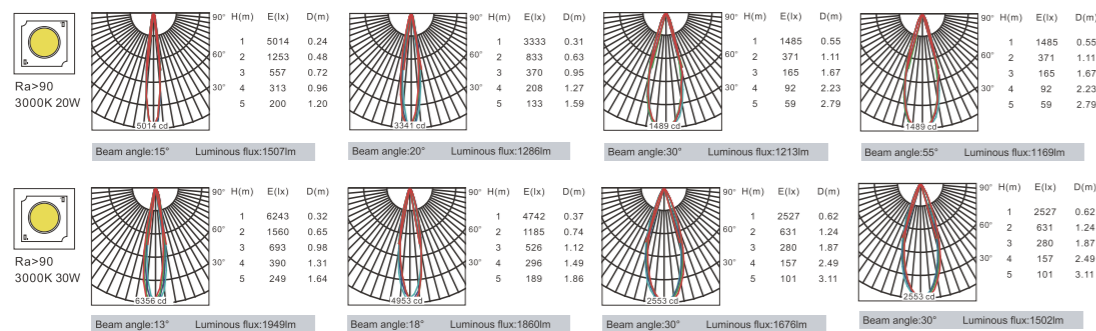

Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-TL18L-C-9520	20W	34V	500mA	90	2700K	15°	2038lm	1590lm	ON-OFF
						20°	2038lm	1557lm	TRIAC
						30°	2038lm	1512lm	DALI
						55°	2038lm	1541lm	
	20W	34V	500mA	90	3000K	15°	2121lm	1655lm	ON-OFF
						20°	2121lm	1621lm	TRIAC
						30°	2121lm	1574lm	DALI
						55°	2121lm	1604lm	
	20W	34V	500mA	90	4000K	15°	2155lm	1681lm	ON-OFF
						20°	2155lm	1814lm	TRIAC
						30°	2155lm	1599lm	DALI
						55°	2155lm	1629lm	
KAS-TL18L-C-9530	30W	34V	700mA	90	2700K	15°	2853lm	2081lm	ON-OFF
						20°	2853lm	2145lm	TRIAC
						30°	2853lm	1981lm	DALI
						55°	2853lm	2012lm	
	30W	34V	700mA	90	3000K	15°	2970lm	2167lm	ON-OFF
						20°	2970lm	2061lm	TRIAC
						30°	2970lm	2063lm	DALI
						55°	2970lm	2095lm	
	30W	34V	700mA	90	4000K	15°	3018lm	2202lm	ON-OFF
						20°	3018lm	2094lm	TRIAC
						30°	3018lm	2096lm	DALI
						55°	3018lm	2128lm	

