







KS-T1-A-50
Power: 7W/12W
Diameter: 50mm

KS-T1-A-66
Power: 15W/20W
Diameter: 60mm

KS-T1-A-74
Power: 25W/30W
Diameter: 74mm

KS-T1-A-90
Power: 35W/40W
Diameter: 90mm









KS-T1-A-50
Power: 7W/12W
Diameter: 50mm

KS-T1-A-66
Power: 15W/20W
Diameter: 60mm

KS-T1-A-74
Power: 25W/30W
Diameter: 74mm

KS-T1-A-90
Power: 35W/40W
Diameter: 90mm



Model	KS-T1-A-50	KS-T1-A-66		KS-T1-A-74	KS-T1-A-90
Product Photo					
Dimension(mm)					
Wattage	7W/12W	15W/20W		25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K		3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90		>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°		15°/24°/36°	20°/24°/36°
Lumen	480-806LM	1154-1885LM		2041-2633LM	2053-3688LM
IP	IP 20	IP 20		IP 20	IP 20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass		Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track		1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White		Black/White	Black/White

Optical Accessories





Honeycomb Filter Stripped Glass Fabric Glass

Model	KS-T1-A-50	KS-T1-A-66	KS-T1-A-74	KS-T1-A-90
Product Photo				
Dimension(mm)				
Wattage	7W/12W	15W/20W	25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K	3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90	>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°	15°/24°/36°	20°/24°/36°
Lumen	480-806LM	1154-1885LM	2041-2633LM	2053-3688LM
IP	IP 20	IP 20	IP 20	IP 20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White	Black/White	Black/White



Optical Accessories





Honeycomb Filter Stripped Glass Fabric Glass

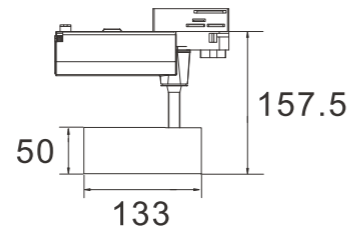




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-A-5007	7W	36V	200mA	90	2700K	18°	556lm	498lm	ON-OFF
						24°	556lm	508lm	TRIAC
						36°	556lm	505lm	1-10V
	7W	36V	200mA	90	3000K	50°	556lm	503lm	DALI
						18°	577lm	497lm	ON-OFF
						24°	577lm	528lm	TRIAC
	7W	36V	200mA	90	4000K	36°	577lm	525lm	1-10V
						50°	577lm	522lm	DALI
						18°	604lm	831lm	ON-OFF
KS-T1-A-5012	12W	36V	300mA	90	2700K	24°	604lm	552lm	TRIAC
						36°	604lm	549lm	1-10V
						50°	604lm	546lm	DALI
	12W	36V	300mA	90	3000K	18°	1112lm	860lm	ON-OFF
						24°	1112lm	906lm	TRIAC
						36°	1112lm	906lm	1-10V
12W	36V	300mA	90	4000K	50°	1112lm	884lm	DALI	
					18°	1155lm	894lm	ON-OFF	
					24°	1155lm	939lm	TRIAC	
KS-T1-A-5012	12W	36V	300mA	90	3000K	36°	1155lm	939lm	1-10V
						50°	1155lm	919lm	DALI
						18°	1209lm	935lm	ON-OFF
						24°	1209lm	982lm	TRIAC
						36°	1209lm	982lm	1-10V
KS-T1-A-5012	12W	36V	300mA	90	4000K	50°	1209lm	961lm	DALI

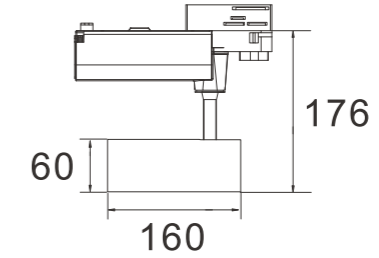

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-A-6615	15W	36V	350mA	90	2700K	12°	1297lm	1118lm	ON-OFF
						18°	1297lm	1154lm	TRIAC
						22°	1297lm	1118lm	1-10V
	15W	36V	350mA	90	3000K	36°	1297lm	1158lm	DALI
						12°	1348lm	1163lm	ON-OFF
						18°	1348lm	1200lm	TRIAC
15W	36V	350mA	90	4000K	22°	1348lm	1163lm	1-10V	
					36°	1348lm	1204lm	DALI	
					12°	1411lm	1217lm	ON-OFF	
KS-T1-A-6620	20W	36V	500mA	90	2700K	18°	1411lm	1256lm	TRIAC
						22°	1411lm	1217lm	1-10V
						36°	1411lm	1260lm	DALI
						12°	1854lm	1503lm	ON-OFF
KS-T1-A-6620	20W	36V	500mA	90	3000K	18°	1854lm	1646lm	TRIAC
						22°	1854lm	1624lm	1-10V
						36°	1854lm	1733lm	DALI
KS-T1-A-6620	20W	36V	500mA	90	4000K	12°	1926lm	1562lm	ON-OFF
						18°	1926lm	1710lm	TRIAC
						22°	1926lm	1688lm	1-10V
						36°	1926lm	1801lm	DALI
						12°	2016lm	1634lm	ON-OFF
KS-T1-A-6620	20W	36V	500mA	90	4000K	18°	2016lm	1789lm	TRIAC
						22°	2016lm	1766lm	1-10V
						36°	2016lm	1885lm	DALI



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-A-7425	25W	36V	600mA	90	2700K	15°	2225lm	2041lm	ON-OFF TRIAC
						24°	2225lm	2076lm	1-10V
						36°	2225lm	2134lm	DALI
25W	36V	600mA	90	3000K	15°	2311lm	2120lm	ON-OFF TRIAC	
					24°	2311lm	2157lm	1-10V	
					36°	2311lm	2217lm	DALI	
25W	36V	600mA	90	4000K	15°	2419lm	2213lm	ON-OFF TRIAC	
					24°	2419lm	2257lm	1-10V	
					36°	2419lm	2320lm	DALI	
KS-T1-A-7430	30W	36V	800mA	90	2700K	15°	2595lm	2341lm	ON-OFF TRIAC
						24°	2595lm	2421lm	1-10V
						36°	2595lm	2222lm	DALI
30W	36V	800mA	90	3000K	15°	2696lm	2433lm	ON-OFF TRIAC	
					24°	2696lm	2516lm	1-10V	
					36°	2696lm	2309lm	DALI	
30W	36V	800mA	90	4000K	15°	2822lm	2546lm	ON-OFF TRIAC	
					24°	2822lm	2633lm	1-10V	
					36°	2822lm	2416lm	DALI	

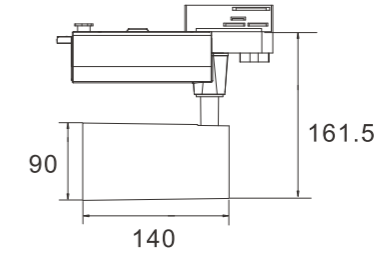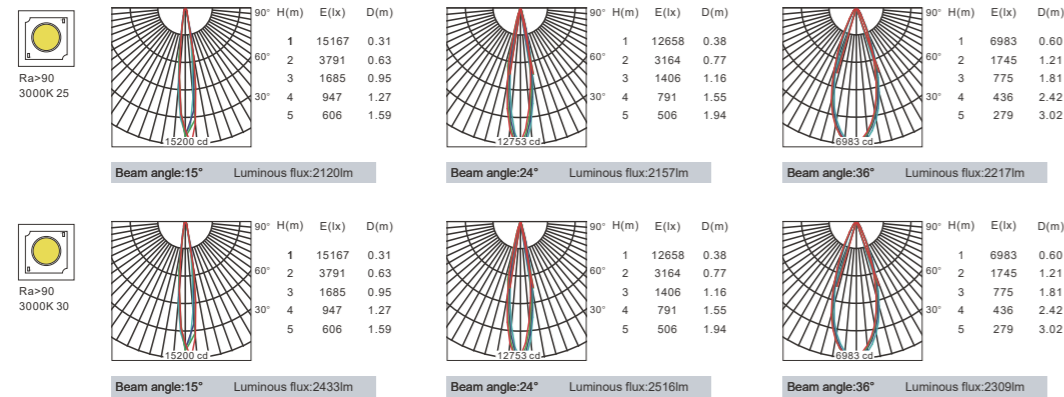

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-A-9035	35W	36V	900mA	90	2700K	20°	2966lm	2393lm	ON-OFF TRIAC
						24°	2966lm	2524lm	1-10V
						36°	2966lm	2053lm	DALI
35W	36V	900mA	90	3000K	20°	3081lm	2486lm	ON-OFF TRIAC	
					24°	3081lm	2622lm	1-10V	
					36°	3081lm	2964lm	DALI	
35W	36V	900mA	90	4000K	20°	3225lm	2602lm	ON-OFF TRIAC	
					24°	3225lm	2744lm	1-10V	
					36°	3225lm	3102lm	DALI	
KS-T1-A-9040	40W	36V	1200mA	90	2700K	20°	3708lm	2995lm	ON-OFF TRIAC
						24°	3708lm	3392lm	1-10V
						36°	3708lm	3254lm	DALI
40W	36V	1200mA	90	3000K	20°	3852lm	3112lm	ON-OFF TRIAC	
					24°	3852lm	3524lm	1-10V	
					36°	3852lm	3381lm	DALI	
40W	36V	1200mA	90	4000K	20°	4032lm	3257lm	ON-OFF TRIAC	
					24°	4032lm	3688lm	1-10V	
					36°	4032lm	3538lm	DALI	

