

Titans  
T1 Series







KS-T1-B-50  
Power: 12W  
Diameter: 50mm

KS-T1-B-66  
Power: 15W/20W  
Diameter: 66mm

KS-T1-B-74  
Power: 25W/30W  
Diameter: 74mm

KS-T1-B-90  
Power: 35W/40W  
Diameter: 90mm









KS-T1-B-50  
Power: 12W  
Diameter: 50mm

KS-T1-B-66  
Power: 15W/20W  
Diameter: 66mm



KS-T1-B-74  
Power: 25W/30W  
Diameter: 74mm

KS-T1-B-90  
Power: 35W/40W  
Diameter: 90mm



Model	KS-T1-B-5012	KS-T1-B-6615		KS-T1-B-7425	KS-T1-B-9035
Product Photo					
Dimension(mm)					
Wattage	12W	15W/20W		25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K		3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90		>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°		15°/24°/36°	20°/24°/36°
Lumen	860-982LM	1018-1885LM		2041-2491LM	2053-3793LM
IP	IP 20	IP 20		IP 20	IP 20
Dimming	DALI	DALI		DALI	DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass		Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track		1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White		Black/White	Black/White


Optical Accessories




Honeycomb Filter Stripped Glass Fabric Glass

Model	KS-T1-B-5012	KS-T1-B-6615		KS-T1-B-7425	KS-T1-B-9035
Product Photo					
Dimension(mm)					
Wattage	12W	15W/20W		25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K		3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90		>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°		15°/24°/36°	20°/24°/36°
Lumen	860-982LM	1018-1885LM		2041-2491LM	2053-3793LM
IP	IP 20	IP 20		IP 20	IP 20
Dimming	DALI	DALI		DALI	DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass		Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track		1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White		Black/White	Black/White

Optical Accessories





Honeycomb Filter






Stripped Glass





Fabric Glass




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-B-5012	12W	36V	300mA	90	2700K	18°	1112lm	860lm	ON-OFF
						24°	1112lm	906lm	
						36°	1112lm	906lm	
						50°	1112lm	884lm	
	12W	36V	300mA	90	3000K	18°	1155lm	894lm	ON-OFF
						24°	1155lm	939lm	
						36°	1155lm	939lm	
						50°	1155lm	919lm	
	12W	36V	300mA	90	4000K	18°	1209lm	935lm	ON-OFF
						24°	1209lm	982lm	
						36°	1209lm	982lm	
						50°	1209lm	961lm	

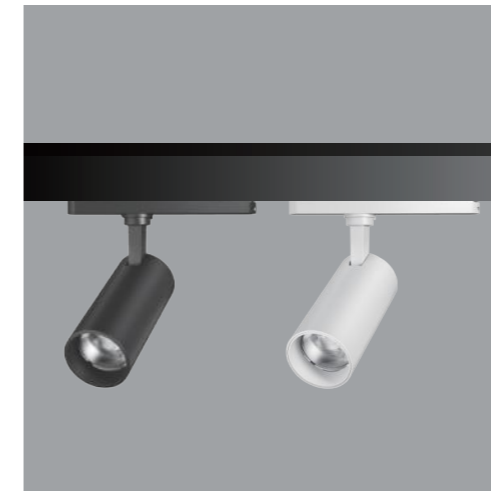


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-B-6615	15W	36V	350mA	90	2700K	12°	1297lm	1118lm	ON-OFF DALI
						18°	1297lm	1154lm	
						22°	1297lm	1018lm	
						36°	1297lm	1158lm	
	15W	36V	350mA	90	3000K	12°	1348lm	1163lm	ON-OFF DALI
						18°	1348lm	1200lm	
						22°	1348lm	1063lm	
						36°	1348lm	1204lm	
	15W	36V	350mA	90	4000K	12°	1411lm	1217lm	ON-OFF DALI
						18°	1411lm	1256lm	
						22°	1411lm	1117lm	
						36°	1411lm	1260lm	
KS-T1-B-6620	20W	36V	500mA	90	2700K	12°	1854lm	1503lm	ON-OFF DALI
						18°	1854lm	1646lm	
						22°	1854lm	1624lm	
						36°	1854lm	1733lm	
	20W	36V	500mA	90	3000K	12°	1926lm	1562lm	ON-OFF DALI
						18°	1926lm	1710lm	
						22°	1926lm	1688lm	
						36°	1926lm	1801lm	
	20W	36V	500mA	90	4000K	12°	2016lm	1634lm	ON-OFF DALI
						18°	2016lm	1789lm	
						22°	2016lm	1766lm	
						36°	2016lm	1885lm	

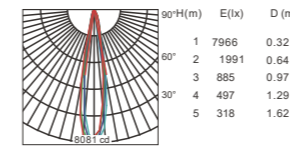


Beam angle 12° Luminous flux: 1163lm

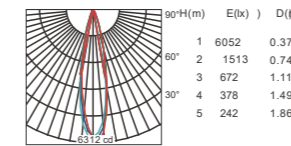



Beam angle 18° Luminous flux: 1200lm

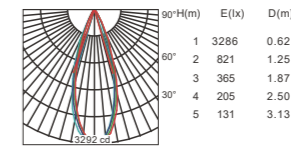


Beam angle 22° Luminous flux: 1063lm

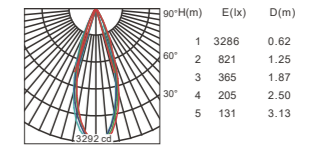


Beam angle 36° Luminous flux: 1204lm

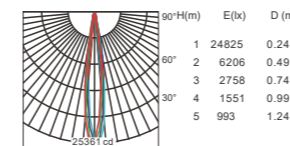


Beam angle 12° Luminous flux: 1562lm

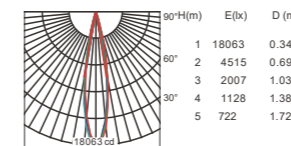





Beam angle 18° Luminous flux: 1710lm

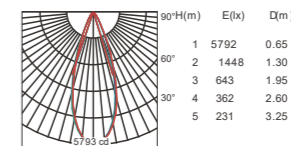

Beam angle 22° Luminous flux: 1688lm

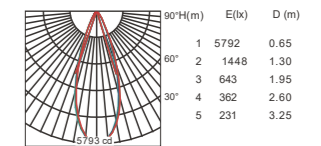

Beam angle 36° Luminous flux: 1801lm



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-B-7425	25W	36V	600mA	90	2700K	15°	2225lm	2041lm	ON-OFF DALI
						24°	2225lm	2076lm	
						36°	2225lm	2134lm	
KS-T1-B-7430	30W	36V	800mA	90	2700K	15°	2595lm	2228lm	ON-OFF DALI
						24°	2595lm	2290lm	
						36°	2595lm	2176lm	
KS-T1-B-7430	30W	36V	800mA	90	3000K	15°	2696lm	2315lm	ON-OFF DALI
						24°	2696lm	2380lm	
						36°	2696lm	2261lm	
KS-T1-B-7430	30W	36V	800mA	90	4000K	15°	2822lm	2423lm	ON-OFF DALI
						24°	2822lm	2491lm	
						36°	2822lm	2366lm	

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-B-9035	35W	36V	900mA	90	2700K	20°	2966lm	2393lm	ON-OFF DALI
						24°	2966lm	2524lm	
						36°	2966lm	2053lm	
KS-T1-B-9040	40W	36V	1000mA	90	2700K	20°	3708lm	2991lm	ON-OFF DALI
						24°	3708lm	3453lm	
						36°	3708lm	3488lm	
KS-T1-B-9040	40W	36V	1000mA	90	3000K	20°	3852lm	3108lm	ON-OFF DALI
						24°	3852lm	3588lm	
						36°	3852lm	3624lm	
KS-T1-B-9040	40W	36V	1000mA	90	4000K	20°	4032lm	3253lm	ON-OFF DALI
						24°	4032lm	3755lm	
						36°	4032lm	3793lm	

