







KAS-TL10L-C-50
Power: 7W
Diameter: 50mm
Cutout: 85-90mm

KAS-TL10L-C-66
Power: 10W/15W
Diameter: 66mm
Cutout: 85-90mm

KAS-TL10L-C-80
Power: 25W/30W
Diameter: 80mm
Cutout: 85-90mm

KAS-TL10R-C-80
Power: 25W/30W
Diameter: 80mm
Cutout: 85-90mm









KAS-TL10L-C-50
Power: 7W
Diameter: 50mm
Cutout: 85-90mm

KAS-TL10L-C-66
Power: 10W/15W
Diameter: 66mm
Cutout: 85-90mm

KAS-TL10L-C-80
Power: 25W/30W
Diameter: 80mm
Cutout: 85-90mm


KAS-TL10R-C-80
Power: 25W/30W
Diameter: 80mm
Cutout: 85-90mm





TL 10 Series
Recessed Spotlight

| Model | KAS-TL10L-C-50 | KAS-TL10L-C-66 | KAS-TL10L-C-80 | KAS-TL10R-C-80 | KAS-TL10L-C-50 | KAS-TL10L-C-66 | KAS-TL10L-C-80 | KAS-TL10R-C-80 |
|---------------|--|--|--|--|--|--|--|--|
| Product Photo | | | | | | | | |
| Dimension(mm) | | | | | | | | |
| Cutout(mm) | 85-90 | 85-90 | 85-90 | 85-90 | 85-90 | 85-90 | 85-90 | 85-90 |
| Wattage | 7W | 10W/15W | 25W/30W | 25W/30W | 7W | 10W/15W | 25W/30W | 25W/30W |
| CCT | 3000K/3500K/4000K | 3000K/3500K/4000K | 3000K/3500K/4000K | 3000K/3500K/4000K | 3000K/3500K/4000K | 3000K/3500K/4000K | 3000K/3500K/4000K | 3000K/3500K/4000K |
| CRI | >90 | >90 | >90 | >90 | >90 | >90 | >90 | >90 |
| Beam Angle | 10°/15°/20°/30° | 10°/15°/20°/36° | 10°/15°/20°/36° | 20°/24°/30°/36° | 10°/15°/20°/30° | 10°/15°/20°/36° | 10°/15°/20°/36° | 20°/24°/30°/36° |
| Lumen | 385LM | 800-1125LM | 2125-2400LM | 2000-2250LM | 385LM | 800-1125LM | 2125-2400LM | 2000-2250LM |
| IP | IP 20 | IP 20 | IP 20 | IP 20 | IP 20 | IP 20 | IP 20 | IP 20 |
| Dimming | TRIAC/1-10V/DALI | TRIAC/1-10V/DALI | TRIAC/1-10V/DALI | TRIAC/1-10V/DALI | TRIAC/1-10V/DALI | TRIAC/1-10V/DALI | TRIAC/1-10V/DALI | TRIAC/1-10V/DALI |
| Accessory | Honeycomb Filter Stripped Glass Fabric Glass | Honeycomb Filter Stripped Glass Fabric Glass | Honeycomb Filter Stripped Glass Fabric Glass | Honeycomb Filter Stripped Glass Fabric Glass | Honeycomb Filter Stripped Glass Fabric Glass | Honeycomb Filter Stripped Glass Fabric Glass | Honeycomb Filter Stripped Glass Fabric Glass | Honeycomb Filter Stripped Glass Fabric Glass |
| Colour | Black/White | Black/White | Black/White | Black/White | Black/White | Black/White | Black/White | Black/White |


Optical Accessories





Honeycomb Filter Stripped Glass Fabric Glass




⌀ 85-90





| Model | Power | LED voltage | LED Current | CRI | CCT | Beam Angle | LED Output | System output | Dimming Type |
|------------------|-------|-------------|-------------|-----|-------|------------|------------|---------------|--------------|
| KAS-TL10L-C-5007 | 7W | 34V | 150mA | 90 | 2700K | 10° | 835lm | 718lm | ON-OFF |
| | | | | | | 15° | 835lm | 743lm | TRIAC |
| | | | | | | 20° | 835lm | 760lm | 1-10V |
| | | | | | | 30° | 835lm | 725lm | DALI |
| | 7W | 34V | 150mA | 90 | 3000K | 10° | 860lm | 740lm | ON-OFF |
| | | | | | | 15° | 860lm | 766lm | TRIAC |
| | | | | | | 20° | 860lm | 783lm | 1-10V |
| | | | | | | 30° | 860lm | 747lm | DALI |
| | 7W | 34V | 150mA | 90 | 4000K | 10° | 872lm | 750lm | ON-OFF |
| | | | | | | 15° | 872lm | 776lm | TRIAC |
| | | | | | | 20° | 872lm | 793lm | 1-10V |
| | | | | | | 30° | 872lm | 757lm | DALI |


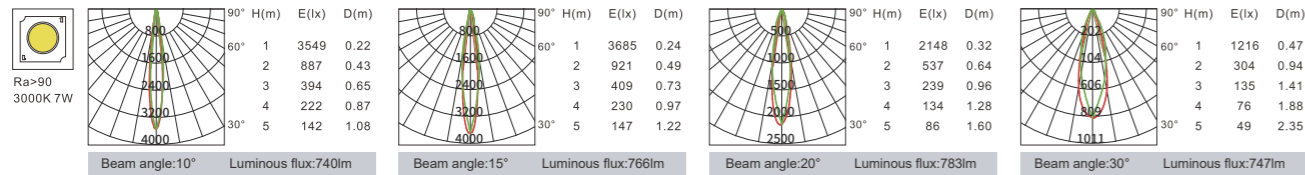


⌀ 85-90




| Model | Power | LED voltage | LED Current | CRI | CCT | Beam Angle | LED Output | System output | Dimming Type |
|------------------|-------|-------------|-------------|-----|-------|------------|------------|---------------|--------------|
| KAS-TL10L-C-6610 | 10W | 34V | 250mA | 90 | 2700K | 10° | 1058lm | 761lm | ON-OFF |
| | | | | | | 15° | 1058lm | 806lm | TRIAC |
| | | | | | | 20° | 1058lm | 717lm | 1-10V |
| | | | | | | 36° | 1058lm | 790lm | DALI |
| | 10W | 34V | 250mA | 90 | 3000K | 10° | 1099lm | 791lm | ON-OFF |
| | | | | | | 15° | 1099lm | 837lm | TRIAC |
| | | | | | | 20° | 1099lm | 745lm | 1-10V |
| | | | | | | 36° | 1099lm | 821lm | DALI |
| | 10W | 34V | 250mA | 90 | 4000K | 10° | 1118lm | 804lm | ON-OFF |
| | | | | | | 15° | 1118lm | 851lm | TRIAC |
| | | | | | | 20° | 1118lm | 757lm | 1-10V |
| | | | | | | 36° | 1118lm | 835lm | DALI |
| KAS-TL10L-C-6615 | 15W | 34V | 350mA | 90 | 2700K | 10° | 1482lm | 960lm | ON-OFF |
| | | | | | | 15° | 1482lm | 1031lm | TRIAC |
| | | | | | | 20° | 1482lm | 918lm | 1-10V |
| | | | | | | 36° | 1482lm | 1006lm | DALI |
| | 15W | 34V | 350mA | 90 | 3000K | 10° | 1538lm | 997lm | ON-OFF |
| | | | | | | 15° | 1538lm | 1070lm | TRIAC |
| | | | | | | 20° | 1538lm | 953lm | 1-10V |
| | | | | | | 36° | 1538lm | 1045lm | DALI |
| | 15W | 34V | 350mA | 90 | 4000K | 10° | 1564lm | 1013lm | ON-OFF |
| | | | | | | 15° | 1564lm | 1080lm | TRIAC |
| | | | | | | 20° | 1564lm | 969lm | 1-10V |
| | | | | | | 36° | 1564lm | 1062lm | DALI |


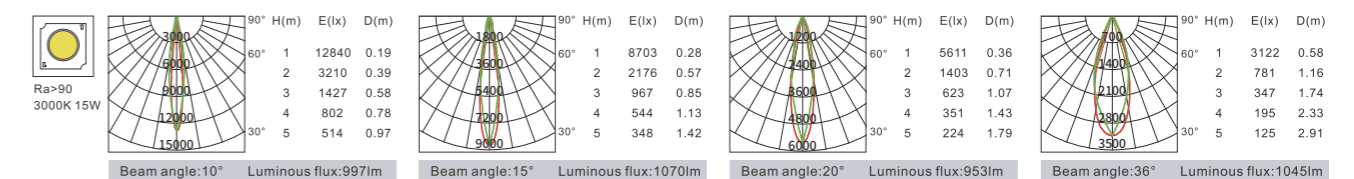
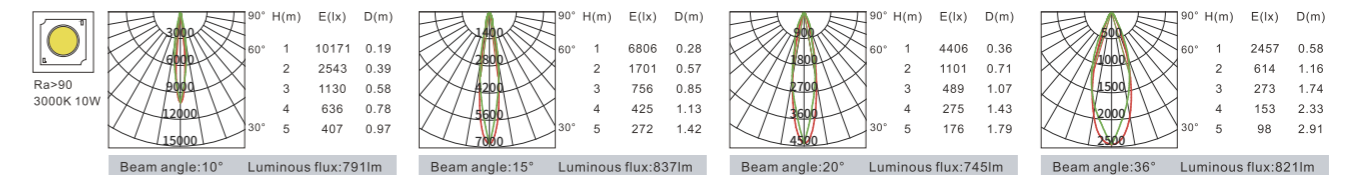





Ø 85-90



| Model | Power | LED voltage | LED Current | CRI | CCT | Beam Angle | LED Output | System output | Dimming Type |
|------------------|-------|-------------|-------------|-----|-------|------------|------------|---------------|--------------|
| KAS-TL10L-C-8025 | 25W | 34V | 600mA | 90 | 2700K | 10° | 2446lm | 1604lm | ON-OFF |
| | | | | | | 15° | 2446lm | 1948lm | TRIAC |
| | | | | | | 20° | 2446lm | 1809lm | 1-10V |
| | | | | | | 36° | 2446lm | 1881lm | DALI |
| | 25W | 34V | 600mA | 90 | 3000K | 10° | 2545lm | 1666lm | ON-OFF |
| | | | | | | 15° | 2545lm | 2027lm | TRIAC |
| | | | | | | 20° | 2545lm | 1883lm | 1-10V |
| | | | | | | 36° | 2545lm | 1885lm | DALI |
| | 25W | 34V | 600mA | 90 | 4000K | 10° | 2586lm | 1692lm | ON-OFF |
| | | | | | | 15° | 2586lm | 2059lm | TRIAC |
| | | | | | | 20° | 2586lm | 1913lm | 1-10V |
| | | | | | | 36° | 2586lm | 1915lm | DALI |
| KAS-TL10L-C-8030 | 30W | 34V | 700mA | 90 | 2700K | 15° | 2853lm | 2164lm | ON-OFF |
| | | | | | | 20° | 2853lm | 2048lm | TRIAC |
| | | | | | | 36° | 2853lm | 2226lm | 1-10V |
| | | | | | | | | | DALI |
| | 30W | 34V | 700mA | 90 | 3000K | 15° | 2970lm | 2253lm | ON-OFF |
| | | | | | | 20° | 2970lm | 2133lm | TRIAC |
| | | | | | | 36° | 2970lm | 2138lm | 1-10V |
| | | | | | | | | | DALI |
| | 30W | 34V | 700mA | 90 | 4000K | 15° | 3018lm | 2289lm | ON-OFF |
| | | | | | | 20° | 3018lm | 2167lm | TRIAC |
| | | | | | | 36° | 3018lm | 2170lm | 1-10V |
| | | | | | | | | | DALI |

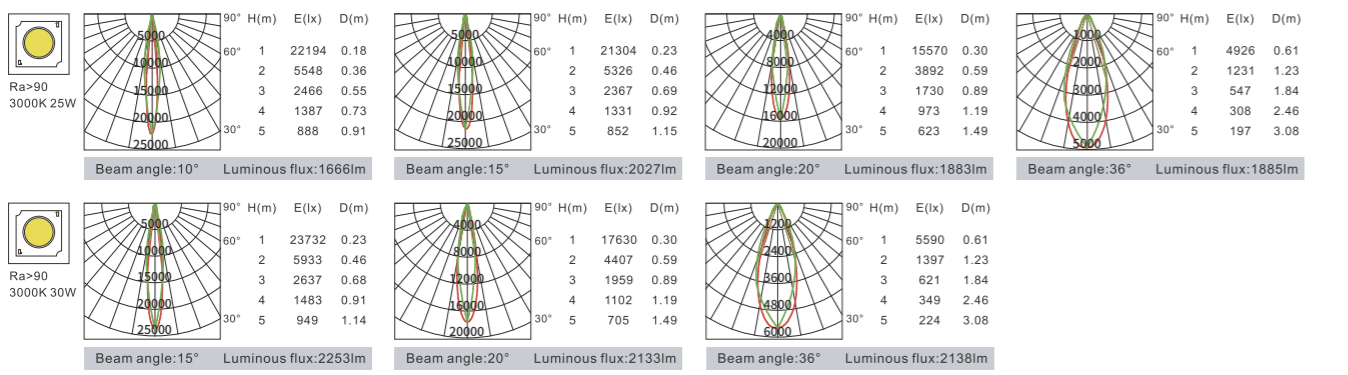

Ø 85-90



| Model | Power | LED voltage | LED Current | CRI | CCT | Beam Angle | LED Output | System output | Dimming Type |
|------------------|-------|-------------|-------------|-----|-------|------------|------------|---------------|--------------|
| KAS-TL10R-C-8025 | 25W | 34V | 600mA | 90 | 2700K | 20° | 2446lm | 1864lm | ON-OFF |
| | | | | | | 24° | 2446lm | 1840lm | TRIAC |
| | | | | | | 30° | 2446lm | 1801lm | 1-10V |
| | | | | | | 36° | 2446lm | 1862lm | DALI |
| | 25W | 34V | 600mA | 90 | 3000K | 20° | 2545lm | 1940lm | ON-OFF |
| | | | | | | 24° | 2545lm | 1915lm | TRIAC |
| | | | | | | 30° | 2545lm | 1874lm | 1-10V |
| | | | | | | 36° | 2545lm | 1938lm | DALI |
| | 25W | 34V | 600mA | 90 | 4000K | 20° | 2586lm | 1971lm | ON-OFF |
| | | | | | | 24° | 2586lm | 1945lm | TRIAC |
| | | | | | | 30° | 2586lm | 1904lm | 1-10V |
| | | | | | | 36° | 2586lm | 1969lm | DALI |
| KAS-TL10R-C-8030 | 30W | 34V | 700mA | 90 | 2700K | 20° | 2853lm | 2115lm | ON-OFF |
| | | | | | | 24° | 2853lm | 2088lm | TRIAC |
| | | | | | | 30° | 2853lm | 2046lm | 1-10V |
| | | | | | | 36° | 2853lm | 2084lm | DALI |
| | 30W | 34V | 700mA | 90 | 3000K | 20° | 2970lm | 2202lm | ON-OFF |
| | | | | | | 24° | 2970lm | 2174lm | TRIAC |
| | | | | | | 30° | 2970lm | 2130lm | 1-10V |
| | | | | | | 36° | 2970lm | 2170lm | DALI |
| | 30W | 34V | 700mA | 90 | 4000K | 20° | 3018lm | 2237lm | ON-OFF |
| | | | | | | 24° | 3018lm | 2209lm | TRIAC |
| | | | | | | 30° | 3018lm | 2164lm | 1-10V |
| | | | | | | 36° | 3018lm | 2205lm | DALI |

